




# MOTORTRONICS™

*Solid State AC Motor Control*

**When safety really matters...**

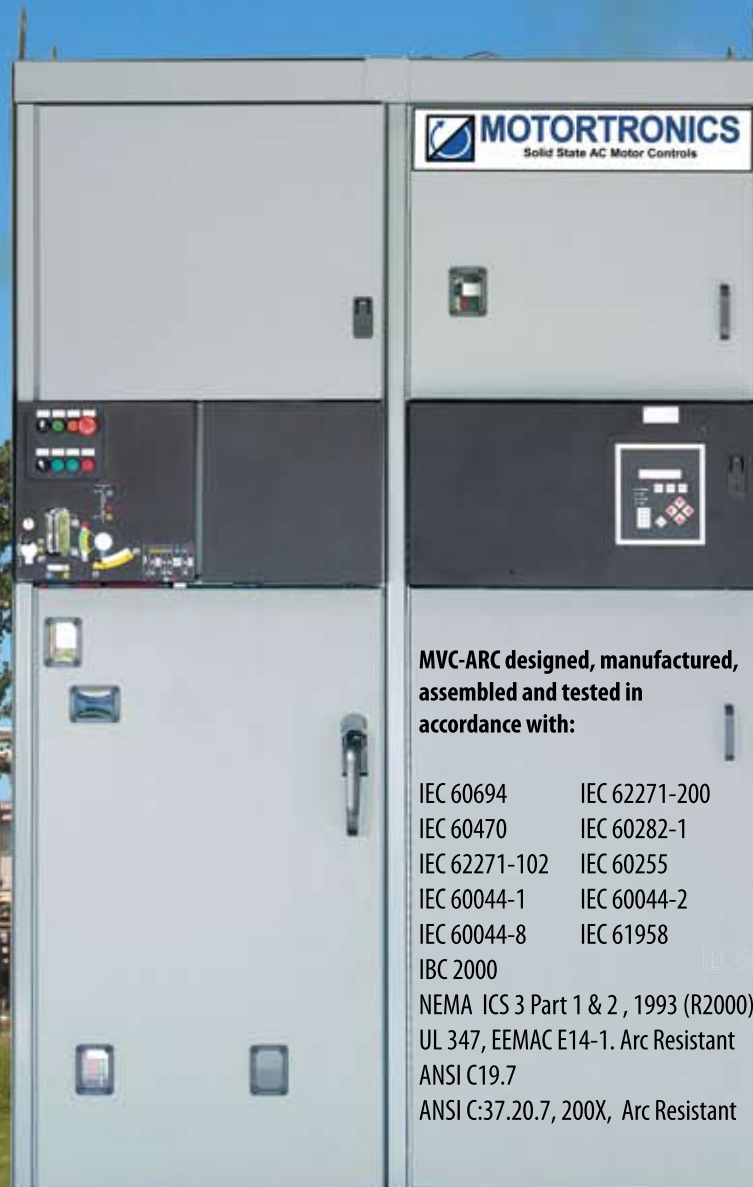

**MVC-ARC designed, manufactured, assembled and tested in accordance with:**

- IEC 60694
- IEC 60470
- IEC 62271-102
- IEC 60044-1
- IEC 60044-8
- IBC 2000
- NEMA ICS 3 Part 1 & 2, 1993 (R2000)
- UL 347, EEMAC E14-1. Arc Resistant
- ANSI C19.7
- ANSI C:37.20.7, 200X, Arc Resistant
- IEC 62271-200
- IEC 60282-1
- IEC 60255
- IEC 60044-2
- IEC 61958
- IEC 60044-8

# MVC-ARC

**ARC Resistant Medium Voltage Soft Starter**



# MVC-ARC

## RATINGS

### Motor Controller Ratings

Rated current	200A	400A
Rated voltage (kV)	7.2	7.2
Rated insulation level		
Power frequency withstand voltage 50 Hz - 1 min (rms kV)	20	20
Lightning impulse withstand voltage 1.2/50 $\mu$ s (kV peak)	60	60
Frequency (Hz)	50/60	50/60
Nominal current and maximum short time withstand current (1)		
Rated current	200	400
Disconnecter 0.25 seconds / 3 seconds	50 kA / 4 kA	50 kA / 4 kA
Equipment (after fuses) 1 second / 30 seconds	4.2/1.7 kA	7.8/3 kA
Earthing Switch Fault Close		
kA Symmetrical	5kA	5kA
kA Peak	14kA	14kA
Internal arc withstand (Optional)		
1.second / 0.5 seconds / 0.25 seconds	25kA / 40kA / 50kA	25kA
0.50 second	40kA	40kA
0.25 second	50kA	50kA
Altitude Rating (meters/ft)	1000/3281	1000/3281

### Contacting Rating

Rated current $I_n$	200	400
Electrical Endurance	250,000	250,000
Mechanical Endurance Standard / Latched	2,500,000 / 250,000	2,500,000 / 250,000
Short Circuit Interrupting Amps (RMS Sym.)	6.3kA	6.3kA
Short Circuit Withstand at Rated Voltage (fused)		
kA Symmetrical / kA Peak	50 / 130	50 / 130
Short time withstand current $I_{th}$ max.		
1 second / 30 seconds	4 / 2.4	6 / 2.4
Chopping Current (Avg. RMS Amps)	0.5	0.5
Switching Frequency (Ops per hour)	1200/300 latched	1200/300 latched
Maximum Closing Time (milliseconds)	100 or less	100 or less
Maximum Opening Time (milliseconds)	30 or less	30 or less

## CORPORATE HEADQUARTERS

### Motortronics / Phasetronics

1600 Sunshine Drive  
Clearwater, Florida 33765  
Tel: 727.573.1819 or 888.767.7792  
Fax: 727.573.1803 or 800.548.4104  
E-mail: sales@motortronics.com  
www.motortronics.com

## INTERNATIONAL LOCATIONS

### Motortronics Int'l Korea Co Ltd

601, Daeryung Techno Tower 5-cha  
Gasan-dong, Geumcheon-gu  
Seoul, Korea 9153-774  
Tel: 82-2-867-5808 / Fax: 82-2-867-6004  
www.motortronics-korea.com



**MOTORTRONICS™**  
Solid State AC Motor Control

### M & P Machinery & Electronics Control

113 Zaoshan Road  
Qingdao, China 266100  
Tel: 86-532-87660633  
Fax: 86-532-87660733  
www.mp-cn.com